

SIMPLY GENIUS.

The Galileo hood, named after a true Italian genius is the perfect combination of hood and hob in a single appliance.



UNLEASH YOUR CREATIVITY.

The cooking zones can be activated together with the same level of power, ideal for cooking food in large pots.



WATERPROOF DESIGN.

The Galileo guarantees normal functioning and complete safety even if large quantities of water are spilled on the hob.

EASY TO USE.

The hob surface is smooth and seamless allowing cleaning in one easy step.



THE MOST EFFECTIVE.

With its clever fluid-dynamic design, the Galileo features a high collection capacity of up to 6.6 metres per second. Even the most persistent cooking vapours and smells are eliminated in just a few minutes.



SPACE SAVING.

The motor's compact design means that the Galileo is the only product in its class that leaves enough free space inside the cabinet for a utensil drawer.



GALILEO SMART

GALILEO SMART BK cod. 340.0577.694



HOOD FEATURES	HOOD PERFORMANCE						
Finish • Black glass / Cast iron grid	Speed <table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>8</td> <td>INT</td> <td>BOOST</td> </tr> </table>	1	2	3	8	INT	BOOST
1	2	3	8	INT	BOOST		
Controls Touch control	Air capacity IEC point <table border="1"> <tr> <td>245</td> <td>285</td> <td>350</td> <td>505</td> <td>550</td> <td>700</td> </tr> </table>	245	285	350	505	550	700
245	285	350	505	550	700		
Grease filter Cassettes dishwasher safe	Pressure <table border="1"> <tr> <td>290</td> <td>370</td> <td>525</td> <td>550</td> <td>555</td> <td>560</td> </tr> </table>	290	370	525	550	555	560
290	370	525	550	555	560		
Ø of air outlet 220x90 mm	Input <table border="1"> <tr> <td>35</td> <td>45</td> <td>65</td> <td>130</td> <td>140</td> <td>220</td> </tr> </table>	35	45	65	130	140	220
35	45	65	130	140	220		
Energy class A++	Noise level <table border="1"> <tr> <td>51</td> <td>55</td> <td>57</td> <td>65</td> <td>66</td> <td>72</td> </tr> </table>	51	55	57	65	66	72
51	55	57	65	66	72		





INDUCTION HOB FEATURES	INDUCTION HOB FEATURES	
Finish • Black glass	Bridge zones <table border="1"> <tr> <td>1</td> </tr> </table>	1
1		
Product dimensions LxW (mm) 830x520	Power setting (stages) <table border="1"> <tr> <td>9</td> </tr> </table>	9
9		
Induction zone 4 2100-3700 W (Single) 4200-7400 W (Bridged)	Timer min-max <table border="1"> <tr> <td>1-59 min.</td> </tr> </table>	1-59 min.
1-59 min.		
Controls Touch control	Booster (P) <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
Max Power (W) 7400	Auto switch off <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
Voltage (V) 220-240	Over temperature protection <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
Frequency (HZ) 50/60	Over current or voltage abnormality protection <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
	Container detection system <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
	Automatic shutdown protection <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
	Power On indicator <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
	Childlock <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		
	Power management <table border="1"> <tr> <td>Yes</td> </tr> </table>	Yes
Yes		





AUTOMATIC FUNCTION

The hood will turn on at the most suitable speed automatically, adapting the extraction capacity to the maximum cooking level.

NOT FLUSH FIT INSTALLATION

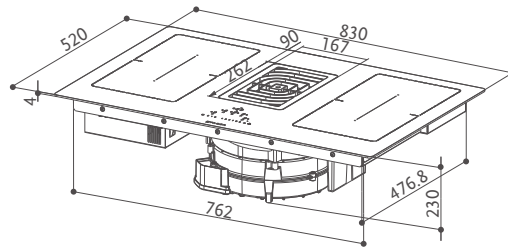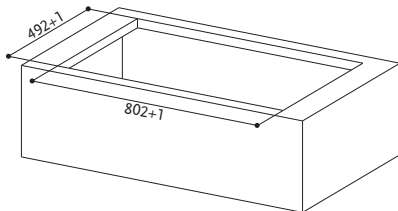

FLUSH FIT INSTALLATION

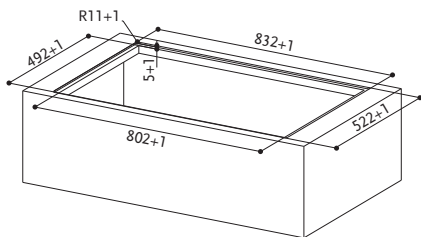

The product is also equipped for installation in 70 cm deep worktop

INSTALLATION OPTIONS

Ducting

cod. 112.0540.782



Rear ducting version installation



Lateral ducting version installation

Recycling

cod. 112.0540.730 60 - 80 mm plinth height
cod. 112.0540.781 100 mm plinth height



Front recycling version installation H100



Front recycling version installation H60