

# Astbury Single Lever

**Product Finish:** Pewter

**Product code:** AT3006

**EAN13 barcode:** 5060048383157



**Product features:**

- Low lead brass construction
- Single lever control for effortless single handed control
- Ceramic handle(s) as standard
- Antisplash spout supplied as standard
- 5 year limited warranty

**Additional information / Parts included:**

Triangular stabiliser, Cache aerator key

**Packaged properties:**


**Box length (mm):** 605    **Box depth (mm):** 85

**Box width (mm):** 320    **Units per outer:** 5

**Tap only weight (kg):** 2.50

**Boxed weight (kg):** 3.40

**Product dimensions:**

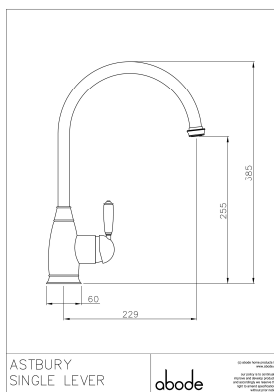


- **Overall Height / projection (mm):** 385
- **Exit reach (mm):** 229
- **Exit height (mm):** 255
- **Centre distance(s):** N/A

- **Base diameter(s) (mm):** 60
- **Recommended hole diameter (mm):** Ø 35
- **Max. surface depth (mm):** 70

- **Spout diameter (mm):** 20
- **Spout aerator size:** M20

**Product flow characteristics:**

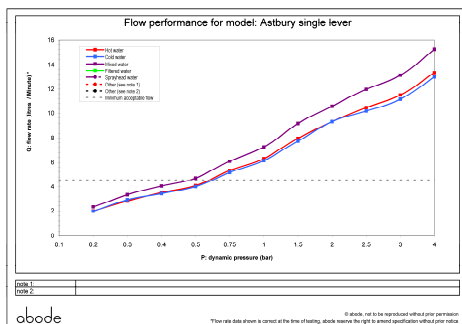

- **Min / Max water pressure (bar):** 0.50 / 5.5
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 13.12

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non-return/Check valve(s):** Integral to H & C inlets

- **Aerator type:** Neoperl SLIM AIR CCSLC – STD flow class V
- **Accepts revolve / spray aerator:** No
- **Spout connection method:** Locking collar

- **Tail pipe inlet / outlet size:** 1/2" BSP Male / M10
- **Inlet pipe type / length (mm):** flexible stainless braided hose / 480

**Care instructions summary:**

- Clean the product regularly using a mild washing up liquid, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary** (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 years
- O-rings, hoses & gaskets warranted for 1 years

abode